arXiv:1304.1463v1 [physics.gen-ph] 3 Apr 2013

A New Ocean Wave Model which do not Rely on Navier-Stokes Equations

Jin-Liang Wang

College of science, Qingdao Technological University,
East Jialingjiang Road No.777, Huangdao Region of Qingdao, 266520, P.R. China.
Tel:+86053268052359.   E-mail: wangjinliang10@sina.com.cn

Abstract

In view of the imperfection of the Navier-Stokes equations in wave description, a simple new model is developed here. Its expression differs from the common trigonometric form in that: (1) it is in a coordinate form synthesized by two piecewise quadratic-curve functions; (2) it has more distinct physical meaning; (3) it accords well with the actual one which has a sharp crest and a flat trough; (4) it yields new relations for the wave parameters, which indicate the increasing of amplitude implies the decreasing of frequency with a quicker speed. These understandings may promote the reconstruction of ocean wave theory.

Keywords: gravity wave, Stokes wave, surface particle, piecewise quadratic-curve form, trigonometric form, dispersion relation.

Preprint submitted to Elsevier *April 5, 2013*

1. Introduction

The study of ocean wave is the oldest branch of hydrodynamics. If it is timed from the application of potential theory the duration should be no less than 200 years and now the classical wave theory is developed, such as in [1-4]. Certainly, the default model is the Navier-Stokes equations, after all, the ocean wave is involved in fluid pressure and movement velocities. But all in all, the Navier-Stokes equations are very complex nonlinear ones and the classical results for ocean wave are merely some kind of linear approximations.

On the assumption that the amplitude A of a wave on the water surface is infinitely small relative to the wave-length λ, that is, $A/\lambda \ll 1$, there is a classical linear wave theory. At this time, the surface traveling wave can be expressed in the trigonometric form[1−3]:

$$\xi(x,t) = A\sin(kx - \omega t), \tag{1}$$

where k and ω are the wave number and frequency. By the way, these two parameters are the inverse expressions for the wave-length λ and wave-period T with $k = 2\pi/\lambda$ and $\omega = 2\pi/T$. For the deep-water case, there is a dispersion relation:

$$\omega^2 = gk \tag{2}$$

and a wave-speed formula:

$$c = \frac{\lambda}{T} = \frac{\omega}{k} = \sqrt{\frac{g}{k}} = \frac{g}{\omega}, \tag{3}$$

here g is the gravity acceleration, which means a wave with lower frequency or wave-number should travel faster.

In case A/λ $(= Ak/2\pi)$ is not infinitely small, that is, the wave steepness Ak takes a finite small value (< 1), there is a finite-amplitude Stokes wave theory[2,4]. At this time, the wave surface and dispersion relation for the deep-water case become

$$\xi(x,t) = A\cos\theta + 0.5kA^2\cos 2\theta + 0.375k^2A^3\cos 3\theta + \cdots, \tag{4}$$

$$\omega^2 = gk\left[1 + (Ak)^2 + 1.25(Ak)^4 + \cdots\right], \tag{5}$$

where $\theta = kx - \omega t$. Moreover, the wave speed can be also deduced from $c = \omega/k$. By the way, for a too big steepness Ak which accords with a too sharp crest the Stokes wave would break down[5].

The above results are very classical and they take fundamental parts in the whole gravity wave theories. As the name implies, a wave is called "gravity wave" if its main restoring force is gravity. We note that, besides the gravity, the maintaining of up-down fluctuation also needs an upward buoyancy. *Do the frequency ω, wave-number k and wave-speed c depend on the amplitude A?* This is an open problem for the above classical wave theories, though the dispersion relation for Stokes wave includes the effect of amplitude. After all, the wave-number k is also an unknown parameter, the dependence of frequency ω on amplitude A is still a suspense, not to say the wave-speed c. As the problem concerned there is not much hope for the Navier-Stokes equations. The reason is that, the solving of these equations involves in determining the upper surface boundary condition which is just the wave to look for[4]. In fact, even the trigonometric wave forms themselves are some kind of conjectures. So it needs an innovation on the wave model.

Notice that the ocean wave is a synthesis of transversal wave and longitudinal wave, we decompose the motion into the vertical part and horizontal part and model them separately in the next two sections. The motion synthesizing process and the traveling-wave modeling process are given in Section 4 and 5 respectively. These modeling processes result in explicit relations for the wave parameters in Section 6 which differ much from that of the classical wave theories. To reflect the characteristics of the derived model we have also made some numerical simulations for it in Section 7. In addition, the summary together with some related discussions are given in the last section.

2. Modeling the Particle's Vertical Motion

We assume that the particle at the water surface always maintains at it during the reciprocating motion process. In fact, this is a fundamental assumption for wave study, such as in [3]. To simplify the problem only the deep-water case is considered here. We note that the small-amplitude assumption is abandoned and the effect of surface tension is neglected. Notice that the particle's horizontal motion has no effect on the vertical one we simplify the problem to an one-dimensional one.

Take the undisturbed water surface as the zero-level ($z = 0$) with positive displacement $z(t)$ upward. The corresponding vertical velocity is denoted by $w(t)$. To be simple, the start time $t = 0$ is chosen from the undisturbed state, that is, $z(0) = 0$ and the particle's upward motion can be understood as from a sudden impulse. In the following we model the reciprocating motion process by 4 stages.

2.1. Stage 1: from the Zero-Level to the Crest

Due to the sudden impulse, the surface particle gains an initial upward velocity $w(0) = w_0$. In the following we describe the motion by force analysis. Denote m and a_z the mass and vertical acceleration of the particle separately. It follows from the Newton's second law $F = ma$ that

$$ma_z = -mg + P_w - P_a, \tag{6}$$

where P_w and P_a stands for the upward pressure from the water below and the downward pressure from the air. In case there is no wind or the wind is not so strong, we can neglect the air pressure effect and take $P_a = 0$. As for the upward pressure P_w, though it plays a part during the rising process, it should be smaller than the gravity mg, after all, this is a decelerating process and the velocity should be 0 at the crest. Roughly, we can neglect the effect of P_w and take the gravity mg as the main restoring force. This simplicity accords well with the concept of "gravity wave". Under the above analysis, we can approximate the vertical acceleration by the gravity acceleration, that is, $a_z \approx -g$.

At this time, the upward velocity and displacement satisfy

$$w(t) = w_0 - gt, \tag{7}$$

$$z(t) = w_0 t - \frac{1}{2} g t^2. \tag{8}$$

Particularly, when the surface particle attains the crest with $w(t_1) = 0$ and $z(t_1) = A$, these equations yield

$$t_1 = \sqrt{\frac{2A}{g}}, \tag{9}$$

where A is actually the wave amplitude.

2.2. Stage 2: from the Crest to the Zero-Level

For the falling case, the eqn.(6) and its approximation $a_z \approx -g$ also hold. At this time, the motion can be seen as in a free-falling manner with reset initial time $t = 0$ at the crest. So the downward velocity and displacement satisfy $w(t) = -gt$ and $z(t) = A - gt^2/2$. Particularly, when it attains the zero-level with $z(t_2) = 0$ its time is

$$t_2 = \sqrt{\frac{2A}{g}}. \tag{10}$$

2.3. Stage 3: from the Zero-Level to the Trough

It follows from Stage 2 that the particle possesses an initial velocity $w(0) = -gt_2 = -\sqrt{2Ag}$ at the zero-level with a reset time $t = 0$. At this stage the falling goes on with a decreasing velocity due to the existence of upward buoyancy. To do the force analysis we choose a tiny water column as the object. Its volume is defined in the form $V(t) = h(t)S$, where $h(t) = -z(t)$ is the distance between the zero-level and the water surface and S is the horizontal area of the water column. For this case, the buoyancy $F_b(t)$ is determined by the volume of water column together with that of the emptied air space in the same quantity. So $F_b(t) = 2\rho g V(t)$, where ρ stands for the water density. Notice that the mass and gravity equal to $m(t) = \rho V(t)$ and $G(t) = \rho g V(t)$ separately, it follows from Newton's second law that $F_b(t) - G(t) \approx m(t)a_z(t)$ which results in $a_z(t) \approx g$. This indicates that the particle at the surface possesses an upward acceleration g. So the falling velocity is $w(t) = w(0)+gt = -gt_2+gt$ and when it attains the trough with $w(t_3) = 0$ the cost time should be $t_3 = t_2 = \sqrt{2A/g}$.

2.4. Stage 4: from the Trough to the Zero-Level

This stage is the inverse process of Stage 3. At this time, the particle accelerates upward from the trough. When it reaches the zero-level, it follows from $0 = z(t_4) = -A + gt_4^2/2$ that $t_4 = \sqrt{2A/g}$. Moreover, it is easy to see that $w(t_4) = gt_4 = gt_1 = w_0$ which implies the beginning of anther up-down period.

By combining the previous four stages we get the particle's up-down reciprocating motion period:

$$T = t_1 + t_2 + t_3 + t_4 = 4\sqrt{\frac{2A}{g}}. \tag{11}$$

To arrange the four stages with a uniform time, then the vertical displacement can be rewritten in a piecewise quadratic-curve form:

$$z(t) = \begin{cases} A - g\left(t - T/4\right)^2/2, & 0 \le t \le T/2, \\ g\left(t - 3T/4\right)^2/2 - A, & T/2 < t \le T. \end{cases} \tag{12}$$

3. Modeling the Particle's Horizontal Motion

Besides the vertical motion, there is also a horizontal one for the surface particle. This motion is mainly caused by the horizontal pressure-gradient force at the slant water surface.

For a hydrostatic case, the water pressure P increases linearly along with the water-layer thickness s, that is, $P = \rho gs$. Assume that the "hydrostatic approximation" holds for the wave fluctuation case, then $P \approx \rho g[\xi(x,t) - z]$, here $\xi(x,t)$ and z are the surface elevation and water depth below the zero-level (with positive sign upward). Particular, for the surface particle it accords with the case $z = 0$. Under this assumption, the horizontal acceleration can be approximated by the Euler equation[3,4]:

$$a_x = \frac{du}{dt} = -\frac{1}{\rho}\frac{\partial P}{\partial x} = -g\frac{\partial \xi}{\partial x}. \tag{13}$$

To simply the problem, we take the wave slope $\partial\xi/\partial x$ as a parameter and denote δ the average of its absolute value over a wave-length, that is,

$$\delta = \frac{1}{\lambda}\int_0^\lambda \left|\frac{\partial \xi(x,t_0)}{\partial x}\right| dx \tag{14}$$

where t_0 is a fixed moment. With this simplicity, the horizontal acceleration can be further approximated by $a_x \approx \delta g$ for the case $\partial\xi/\partial x < 0$ and $a_x \approx -\delta g$ for the case $\partial\xi/\partial x > 0$. In the following we describe the particle's horizontal motion according to the 4 stages adopted by the vertical modeling.

3.1. Stage 1: from the Zero-Level to the Crest

We choose the start time $t = 0$ as the moment that the surface particle is just at the zero-level. Alone with the rising movement, it accelerates horizontally due to the existence of positive pressure-gradient force with $\partial\xi/\partial x < 0$, after all, the crest is on the left side of it at this time. So the horizontal velocity satisfies $u(t) = u_0 + \delta g t$, where u_0 is the initial velocity which is usually caused by the current. Particular, for the no-current case it reads $u(t) = \delta g t$. Correspondingly, the horizontal displacement relative to the location of the crest is

$$x(t) = -\delta A + \frac{1}{2}\delta g t^2, \tag{15}$$

since the crest occurs at $t = T/4$ with vertical displacement $A = g(T/4)^2/2$.

3.2. Stage 2: from the Crest to the Zero-Level

When the particle attains the crest its vertical velocity decreases to 0 and its horizontal velocity increases to the maximum value $u_c = \delta g T/4$. So the next stage is a falling process. At this time, the crest is on the right side of it with $\partial\xi/\partial x > 0$. So $u(t) = u_c - \delta g(t - T/4)$ with $u(T/2) = 0$. Similarly, the corresponding horizontal displacement relative to the location of the crest is

$$x(t) = u_c\,(t - T/4) - \frac{1}{2}\delta g\,(t - T/4)^2\,, \quad t \in [T/4, T/2]. \tag{16}$$

3.3. Stage 3: from the Zero-Level to the Trough

At this stage, the falling goes on with a negative horizontal acceleration. So $u(t) = 0 - \delta g(t - T/2)$. Relative to the location of the crest its displacement becomes

$$x(t) = \delta A - \frac{1}{2}\delta g\,(t - T/2)^2\,, \quad t \in [T/2, 3T/4]. \tag{17}$$

3.4. Stage 4: from the Trough to the Zero-Level

When the particle attains the trough its vertical velocity decreases to 0 and its horizontal velocity decreases to the minimum value $u_t = -\delta g T/4$. As it increases, the horizontal acceleration turns to positive which results in $u(t) = u_t + \delta g(t - 3T/4)$ and

$$x(t) = u_t\,(t - 3T/4) + \frac{1}{2}\delta g\,(t - 3T/4)^2\,, \quad t \in [3T/4, T]. \tag{18}$$

Moreover, it is easy to see that $x(T) = -\delta A$ and $u(T) = 0$ which imply the beginning of anther wave period.

To synthesize the above 4 stages with some modulations, it yields a model for the surface-particle's horizontal motion:

$$x(t) = \begin{cases} -\delta A + \delta g t^2/2, & 0 \le t \le T/4, \\ \delta A - \delta g \left(t - T/2\right)^2/2, & T/4 < t \le 3T/4, \\ -\delta A + \delta g (t-T)^2/2, & 3T/4 < t \le T. \end{cases} \tag{19}$$

Here the default equilibrium point is $x_0 = 0$. Similar to the vertical model, this is also a piecewise quadratic-curve form.

4. Synthesis of the Particle's Motion

According to the previous modeling processes, the trace of the surface-particle's motion can be seen as the location shifting of $(x(t), z(t))$. Here $x(t)$ and $z(t)$ are the horizontal and vertical coordinates given in eqn.(19) and eqn.(12) separately. It follows from Figure 1 that the models of piecewise quadratic-curve forms for the horizontal and vertical motions are very close to the trigonometric forms adopted by the classical linear wave theory with some modifications. This, at least, indicates that the derived models are acceptable. Their advantages lie in distinct physical meaning, flexible wave slope and explicit dependence of frequency on amplitude. In addition, as shown in Figure 2, the trace of the particle's motion is very close to the elliptic curve $x^2/(\delta A)^2 + z^2/A^2 = 1$. It is interesting to find that the lower wave slope δ implies the thinner ellipse.

5. Modeling the Traveling Wave

Since the wave fluctuation can be seen as a coherent movement of many surface particles, it is convenient to express the wave surface in a coordi-

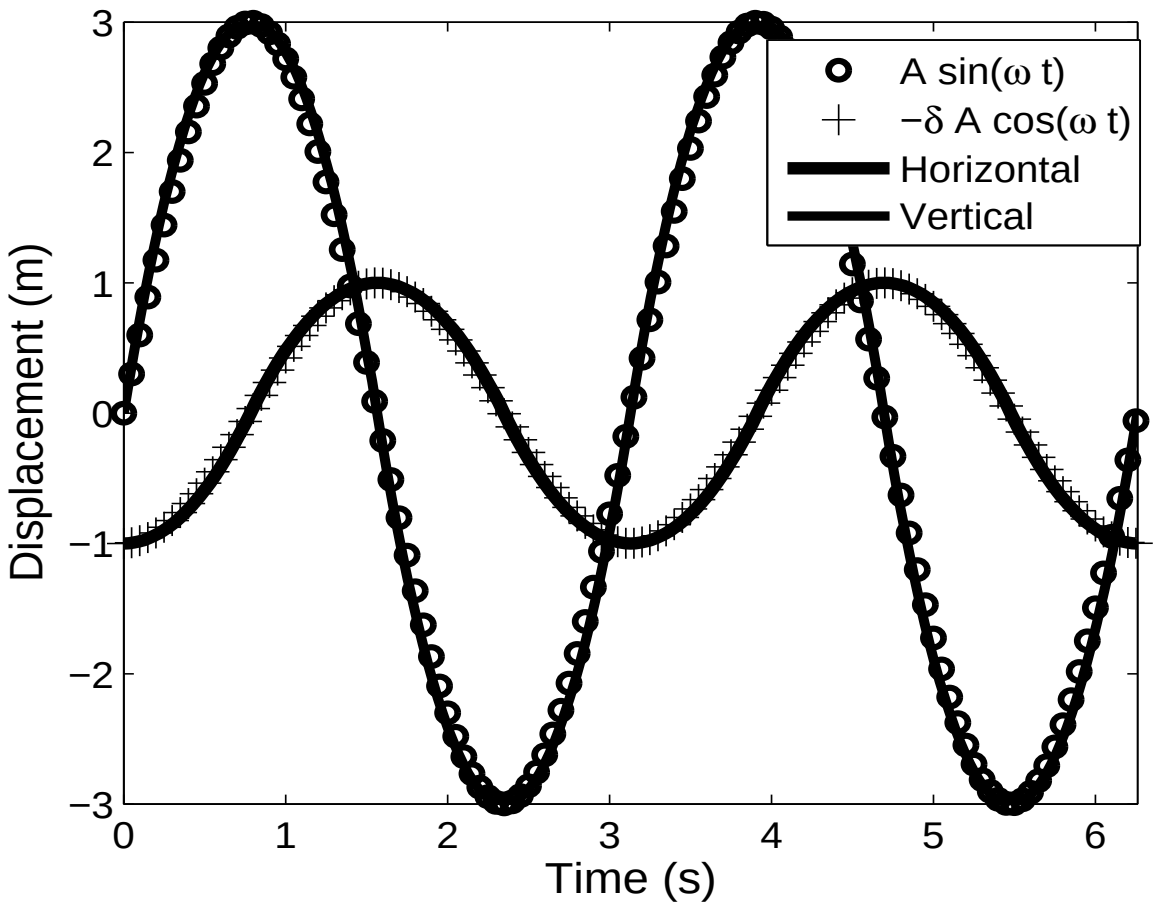

Figure 1: The variations of the horizontal and vertical displacements for the surface particle with $A = 3$, $\delta = 1/3$ and $\omega = \pi\sqrt{g/8A}$. For comparison, the trigonometric functions $A \sin \omega t$ and $-\delta A \cos(\omega t)$ are also drawn.

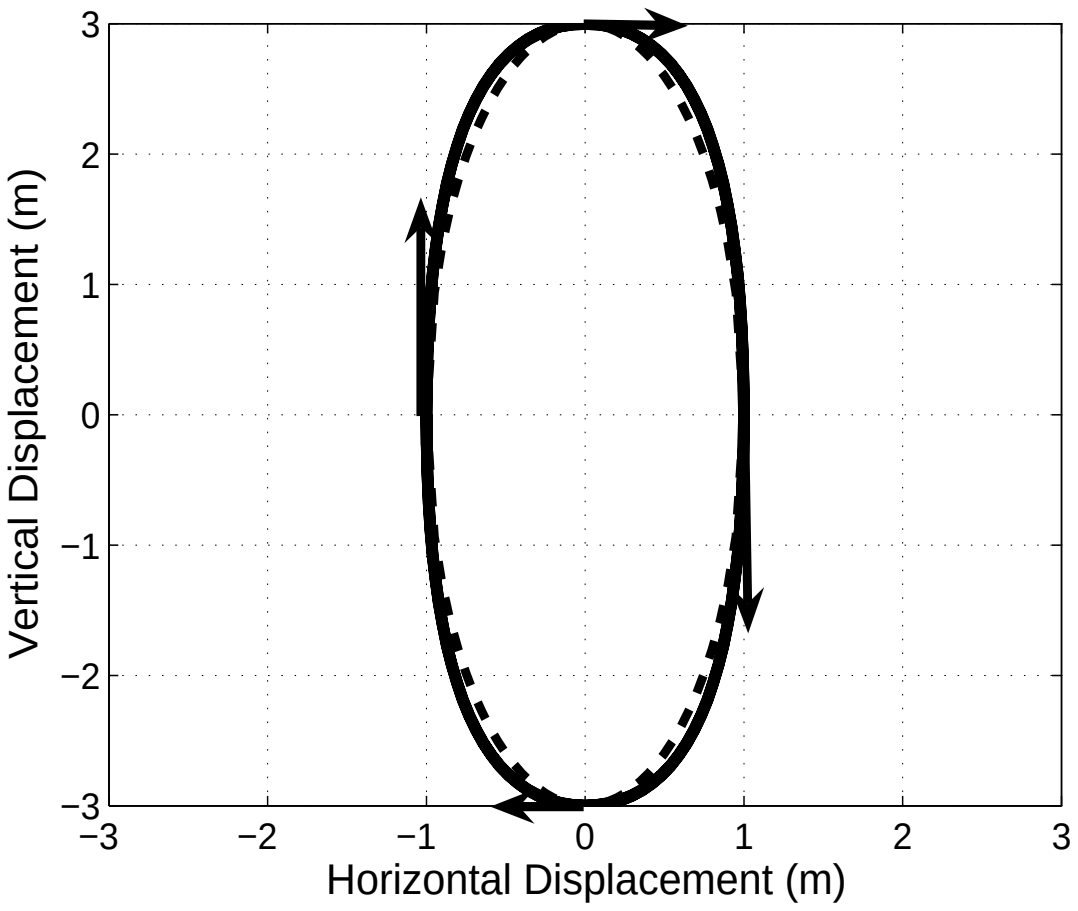

Figure 2: The trace of the surface-particle's motion with $A = 3$, $\delta = 1/3$ (—). For comparison the elliptic curve $x^2 + z^2/9 = 1$ (- -) is also drawn. Here the arrows depict the movement velocities at the key points.

nate form $(x(x_0,t), z(x_0,t))$. Here x_0 is the common horizontal location and $x(x_0,t)$, $z(x_0,t)$ are the horizontal and vertical displacements of the surface particle relative to the equilibrium x_0. To accords with the using habit, sometimes we still use the nominal denotation $z = \xi(x,t)$ as in the previous to stand for the wave surface, though x and z have no explicit relation. At first, we describe the instantaneous state of wave surface at $t = 0$ in the following way.

To incorporate the horizontal location x_0 into eqn.(19) by a substitution $t = kx_0/\omega$ together with a translational term, it leads to:

$$x(x_0,0) = \begin{cases} -\delta A + \delta g(kx_0)^2/2\omega^2 + x_0, & 0 \le kx_0 \le \pi/2, \\ \delta A - \delta g\left(kx_0 - \pi\right)^2/2\omega^2 + x_0, & \pi/2 < kx_0 \le 3\pi/2, \\ -\delta A + \delta g(kx_0 - 2\pi)^2/2\omega^2 + x_0, & 3\pi/2 < kx_0 \le 2\pi. \end{cases} \tag{20}$$

Here the transform $T = 2\pi/\omega$ is used. For the vertical one, since our modeling is started from the moment that the surface particle is at the zero-level with an rising trend, the wave surface should begin with a trough rather than a crest. So it follows from eqn.(12) that

$$z(x_0,0) = \begin{cases} -A + g\left(kx_0 - \pi/2\right)^2/2\omega^2, & 0 \le kx_0 \le \pi, \\ A - g\left(kx_0 - 3\pi/2\right)^2/2\omega^2, & \pi < kx_0 \le 2\pi. \end{cases} \tag{21}$$

Now that the initial wave surface is known, the traveling wave form only requires a substitution of kx_0 with $\theta = kx_0 - \omega t - 2n\pi$ $(n = 0, 1, 2, \cdots)$. The final traveling wave of coordinate form is $(x(x_0,t), z(x_0,t))$ with

$$x(x_0,t) = \begin{cases} -\delta A + \delta g\theta^2/2\omega^2 + x_0, & 0 \le \theta \le \pi/2, \\ \delta A - \delta g\left(\theta - \pi\right)^2/2\omega^2 + x_0, & \pi/2 < \theta \le 3\pi/2, \\ -\delta A + \delta g(\theta - 2\pi)^2/2\omega^2 + x_0, & 3\pi/2 < \theta \le 2\pi. \end{cases} \tag{22}$$

$$z(x_0,t) = \begin{cases} -A + g\left(\theta - \pi/2\right)^2/2\omega^2, & 0 \le \theta \le \pi, \\ A - g\left(\theta - 3\pi/2\right)^2/2\omega^2, & \pi < \theta \le 2\pi. \end{cases} \tag{23}$$

These are piecewise quadratic-curve forms which differ much from the trigonometric form given in eqn.(1).

6. Formulas for Wave Parameters

It follows from eqn.(22) and (23) that the wave parameters associated with the derived traveling wave are A, ω, k and δ. To derive the relations for them we take the wave amplitude A and the averaged wave slope δ as fundamental ones. Firstly, eqn.(11) yields an explicit dependence of frequency on amplitude:

$$\omega = \frac{2\pi}{T} = \pi\sqrt{\frac{g}{8A}}. \tag{24}$$

Notice that the wave slope keeps its sign on each $\lambda/4$ with almost the same averaged value, set $t_0 = 0$ then it follows from eqn.(14) that

$$\begin{aligned} \delta &= \frac{1}{\lambda}\int_0^\lambda \left|\frac{\partial\xi(x,0)}{\partial x}\right| dx \approx \frac{4}{\lambda}\left|\int_0^{\lambda/4} \frac{\partial\xi(x,0)}{\partial x} dx\right| \\ &= \frac{4}{\lambda}|\xi(\lambda/4,0) - \xi(0,0)| = \frac{4}{\lambda}|-A-0| = \frac{4A}{\lambda} = \frac{2Ak}{\pi} \end{aligned}$$

which yields

$$k = \frac{\pi\delta}{2A}. \tag{25}$$

Further deduction leads a formula to the wave speed:

$$c = \frac{\lambda}{T} = \frac{\omega}{k} = \frac{\sqrt{2gA}}{2\delta}, \tag{26}$$

which indicates that the wave with a big amplitude or a small slope should possess a quick speed. To combine ω and k with A it leads to a dispersion relation as follows:

$$\omega^2 = \frac{\pi}{4\delta} gk. \tag{27}$$

This indicates that the one for linear wave accords with the case $\delta = \pi/4 \approx 0.78$ which is a too sharp slope to meet the small-amplitude hypothesis. In another word, the dispersion relation $\omega^2 = gk$ for ocean wave is doubtful. Due to the nonlinear approximation processing on the Navier-Stokes equations, the one for Stokes wave should be more reliable. By substitution of wave steepness with $Ak = \pi\delta/2$, the dispersion relation in eqn.(5) for the Stokes wave can be rewritten as $\omega^2 = \alpha_0 gk$ with $\alpha_0 = 1+(\pi\delta/2)^2+1.25(\pi\delta/2)^4+\cdots$. So for the actual wave, its dispersion relation $\omega^2 = \alpha gk$ should possess a factor $\alpha > 1$ and our one is valid for $\delta < \pi/4$. As for more exact upper bound of δ it would involve in wave-breaking arguments[5,6] and further research is expected.

7. Numerical Simulations

To reflect the characteristics of the derived model we make some numerical simulations here. Chose $A = 3$ m and $\delta = 0.6$, then $\omega = \pi\sqrt{g/8A} \approx 2.00$ rad/s and $k = \pi\delta/2A \approx 0.31$ rad/m. It follows from Figure 3 that the wave of piecewise quadratic-curve form accords well with the actual one which has a sharp crest and a flat trough. For comparison, the linear wave of trigonometric form $-A\sin(kx - \omega t)$ and the third-order Stokes wave at $t = 0$ are also drawn. The differences are very clear. By the way, here only the case $t = 0$ is considered and there is no reflection on the frequency diversity which can be tested with further simulations. In addition to the surface state at $t = 0$ s, the one at $t = 0.7T = 0.7\sqrt{32A/g} \approx 2.12$ s is also drawn for our model. It indicates that the traveling characteristic accords well with the common sense.

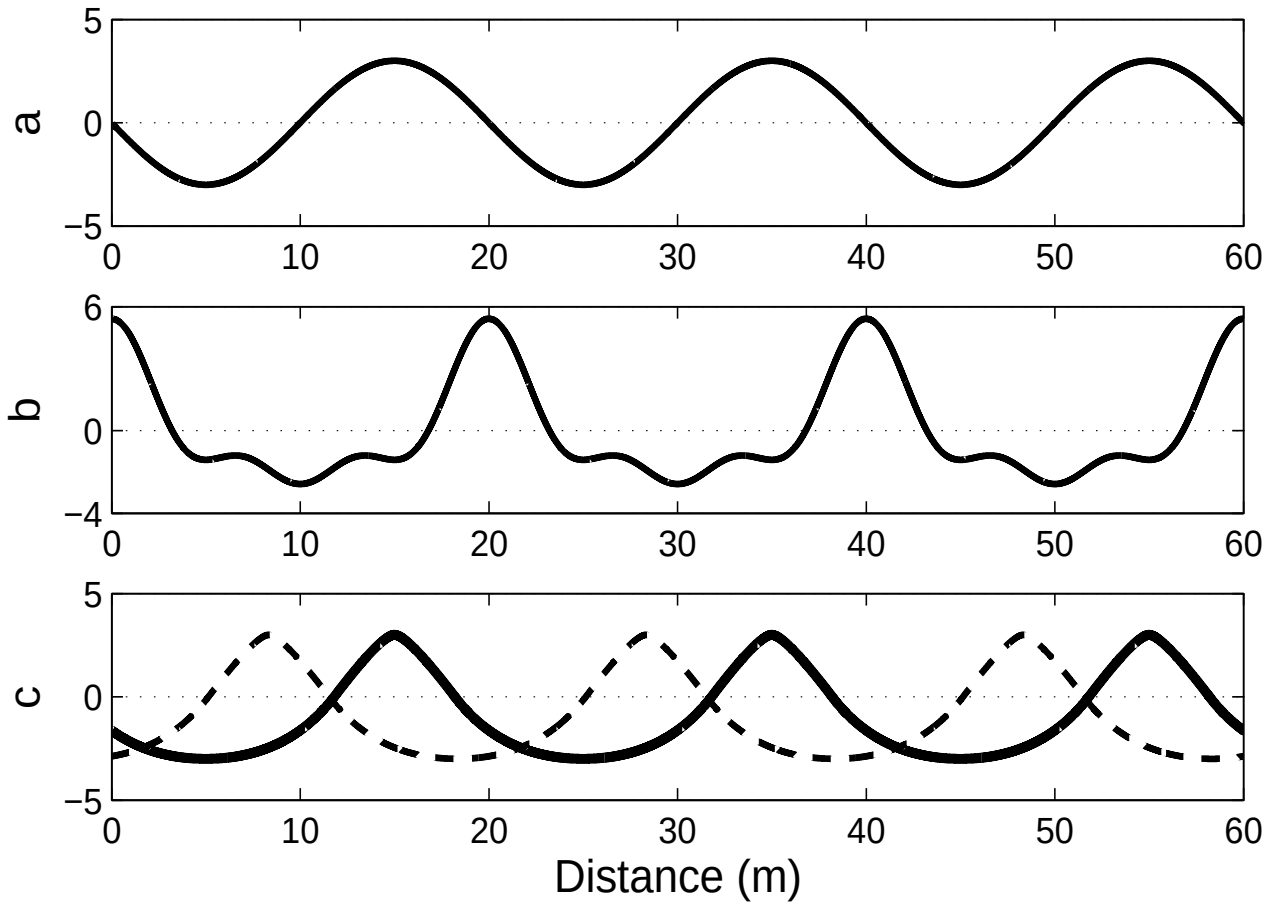

Figure 3: Numerical simulations for different wave models. a: the linear wave of trigonometric form $-A\sin(kx - \omega t)$ at $t = 0$; b: the third-order Stokes wave at $t = 0$; c: the wave of piecewise quadratic-curve form at $t = 0$ (—) and $t = 0.7T$ (- -). Here $k = \pi\delta/2A$ with $A = 3$ and $\delta = 0.6$.

8. Summaries and Discussions

By modeling approach we have deduced a new model for the ocean wave which can be seen as an innovation on the classical ones. It differs from the common trigonometric solution of Navier-Stokes equations in that: (1) It is in a coordinate form synthesized by two piecewise quadratic-curve functions; (2) It has more distinct physical meaning; (3) It accords well with the actual one which has a sharp crest and a flat trough; (4) It yields new relations for wave parameters:

$$\omega = \pi\sqrt{\frac{g}{8A}}, \quad k = \frac{\pi\delta}{2A}, \quad c = \frac{\sqrt{2gA}}{2\delta},$$

which indicates the crack of the open problem. These formulas are very useful. Here we only give two examples for the first one.

If the wave is under a developing process, the first relation can give a well guidance to its variation. That is to say, along with the increasing of amplitude A, its period increases in the clear way with $T = \sqrt{32A/g} \approx 1.8\sqrt{A}$. It follows from Figure 4 that if the wave amplitude is increased from 4 m to 5 m then the corresponding period should increase from 3.6 s to 4 s.

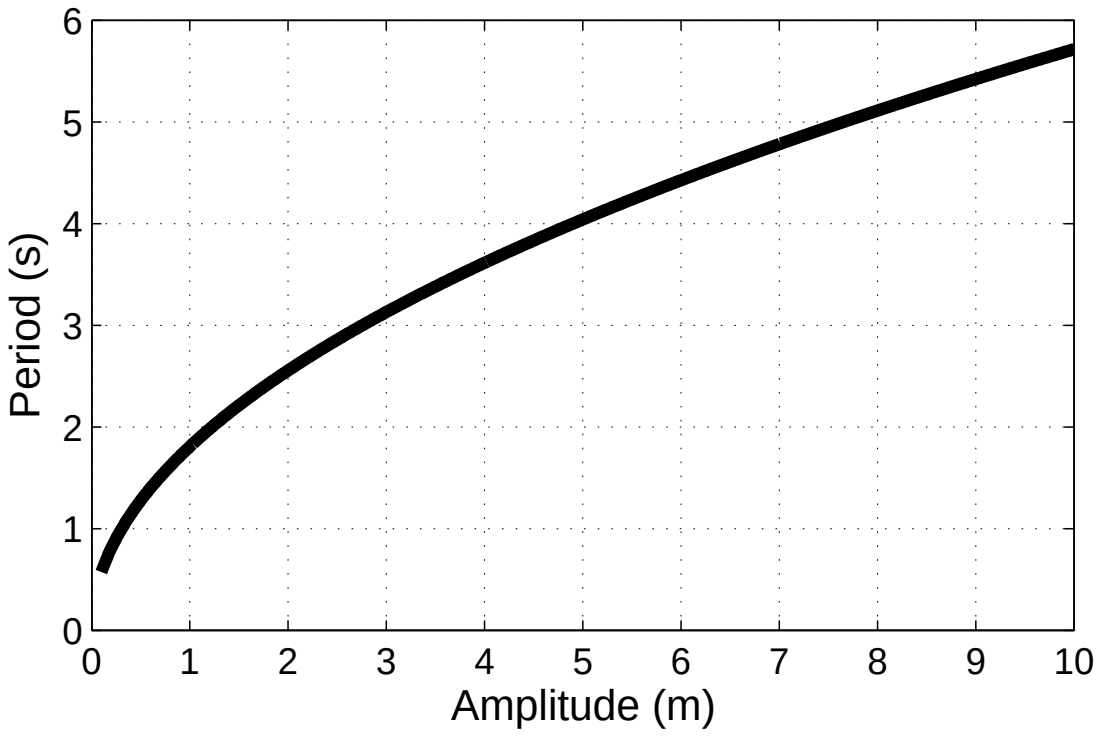

Figure 4: The variation of wave period T along with the increasing of amplitude A.

This formula can be also used in a reverse way. Notice that the amplitude is $A = g\pi^2/8\omega^2$, we can express the wave energy by

$$E = \frac{1}{2}A^2 = \frac{g^2\pi^4}{128\omega^4} \approx \frac{73}{\omega^4}.$$

Therefore, the wave with a low frequency should possess a high energy and the dependence is up to the fourth power. This understanding is helpful for improving the wave spectrum theory[3].

In addition, in view of the similarity in Figure 1, the ocean wave model of piecewise quadratic-curve forms (22) and (23) can be approximated by the simple fully-smooth trigonometric forms:

$$x(x_0, t) = -\delta A \cos(kx_0 - \omega t) + x_0, \tag{28}$$

$$z(x_0, t) = -A \sin(kx_0 - \omega t), \tag{29}$$

which takes the linear wave $z = -A \sin(kx - \omega t)$ as a limiting case with $\delta \to 0$.

Acknowledgments. We thank the support from the Shandong Province Natural Science Fund, P.R. China (No.ZR2012DM004).

References

[1] O. M. Phillips. The Dynamics of the Upper Ocean (Second edition). Syndics of the Cambridge University Press, England, 1977, p.33-42.

[2] A. Soloviev and R. Lukas. The Near-Surface Layer of the Ocean, Structure, Dynamics and Applications. Springer Press, the Netherlands, 2006, p.41-210.

[3] R. G. Dean and R. A. Dalrymple. Water Wave Mechanics for Engineers and Scientists (Second edition). World Scientific Press, Singapore, 1991, p.33-59.

[4] R. H. Stewart. Introduction to Physical Oceanography. http:// ocean-world.tamu.edu/resources/ocng_textbook/contents.html, 2005, p.121-275.

[5] S. R. Massel. Ocean Waves Breaking and Marine Aerosol Fluxes. Springer Science and Business Media, New York, 2007, p.11-27.

[6] E. A. Sharkov. Breaking Ocean Waves: Geometry, Structure and Remote Sensing. Springer, Praxis Publishing Ltd, UK, 2007.